

# Fluke 362

## 200A AC / DC Clamp Meter

Ready to go wherever your work takes you.

The new Fluke 362 Clamp Meter is designed to fit easily in your pocket. The small 18 mm triangular jaw allows access into tight places where other clamp meters can't reach, while providing the accuracy you can trust from a Fluke tool. This durable clamp meter is a must-have for basic clamp measurements.

### Features & Benefit

- CAT III 600 V safety rating
- 200 A AC / DC current and 600 V AC / DC voltage
- 3000  $\Omega$  resistance range
- Continuity detection
- Zero function allows the display to be cleared for DC measurements
- Data hold function
- Large, easy-to-read display for easy viewing
- 18 mm triangular jaw allows for easy measurement in tight space
- Thin, light, compact body design for one-hand operation
- 2 years warranty
- Fluke India Calibration Certificate included



**Technical specifications**

	Range	Resolution	Accuracy
AC current	200 A	0.1 A	2 % ± 5 digits (45-65 Hz) 2.5 % ± 5 digits (65-400 Hz)
DC current	200 A	0.1 A	2 % ± 5 digits
AC voltage	600 V	0.1 V	1.5 % ± 5 digits (45-400 Hz)
DC voltage	600 V	0.1 V	1 % ± 5 digits
Resistance	300/3000Ω	0.1/1Ω	1 % ± 5 digits
Continuity		≤ 70 Ω	
Data hold		Yes	

**General specifications**

Size (LxWxH)	205 mm × 60 mm × 22 mm
Jaw opening	18 mm
Weight	196 g
Safety rating	CAT III 600 V
Warranty	2 years

**Typical Applications**

- UPS / Inverter troubleshooting
- Battery charger trouble shooting
- Battery bank maintenance
- Residential / Commercial buildings
- Industrial troubleshooting
- General electrical / electronics maintenance




**Ordering information**

Fluke 362 Clamp Meter

**Included:**

Clamp meter, TL75 test lead set, two AAA batteries (installed) and user manual.

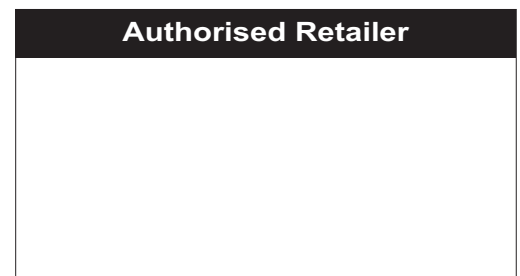

Fluke .The Most Trusted Tools In The World.



**Fluke**

Deodhar Center, 424, Marol Maroshi Road, Andheri (E), Mumbai - 400059  
 Helpdesk : 1800 209 1032 | Email : techsupport.india@fluke.com | Web : www.fluke.com/india  
 www.facebook.com/flukeindia

